


- NOTES:**
- SERIES 8 MIXER ELECTRICAL:
 - SERIES 850 = 4-1/2 HP., 230/460V., 3 PH., 60 HZ.
 - SERIES 870 = 7-1/2 HP., 230/460V., 3 PH., 60 HZ.
 - 120 VOLT INPUT FOR OPERATOR CONTROL CIRCUIT.
 - MIXER WATER INPUT
 - SERIES 850 = 12 GPM. @ 40 PSI. WITH 1/2" SUPPLY MINIMUM.
 - SERIES 870 = 20 GPM. @ 40 PSI. WITH 3/4" SUPPLY MINIMUM.
 - CRYOLATOR 4.5X6 & 4.5X8
 - ELECTRICAL = 2 HP., 230/460V., 3 PH., 60HZ.
 - HYDRAULIC = 8 GPM. @ 800 PSI.
 - RESERVE TANK - RT50 & RT70
 - ELECTRICAL - 230V//460V., 3 PH., 60 HZ.
 - HYDRAULIC - 14 GPM. @ 800 PSI.
 - CONNECTIONS SHOULD NOT INTERFERE WITH EQUIPMENT FUNCTION.
 - FOOD VINYL TUBE (REINFORCED FOR SUCTION) IS USED FOR CONNECTIONS. TUBE BENDS ARE USED AS NEEDED TO PREVENT KINKING.
 - THE MIXING SYSTEM SHOULD NOT BE MORE THAN TWO FEET FROM THE APPLICATOR.
 - MIXER MUST HAVE 22" CLEARANCE ON BOTH SIDES TO OPEN DOORS.

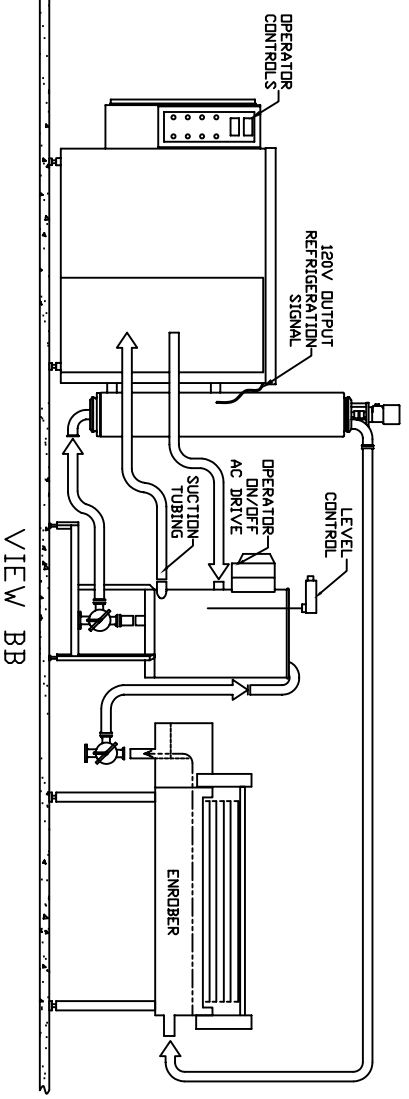

Wilevco, Inc.
10 Fortune Drive
Billerica, MA 01821-3996
Phone: (978) 667-0400
Fax: (978) 670-9191

THIS DRAWING AND ANY DESIGN HEREON IS COPYRIGHT AND REMAINS THE PROPERTY OF WILEVCO INC. IT MAY NOT BE COPIED, LOANED OR DISCLOSED TO A THIRD PARTY WITHOUT SUBJECT TO RECALL.

No.	Revision Description	Date	By/Rev

INSTALLATION LAYOUT
SERIES 8 MIXER, CRYOLATOR
RESERVE TANK & ENROBER

Scale: 1 = 1
Date: 06/29/2007
Drawn By: M R Lakshmi

SE - 0735