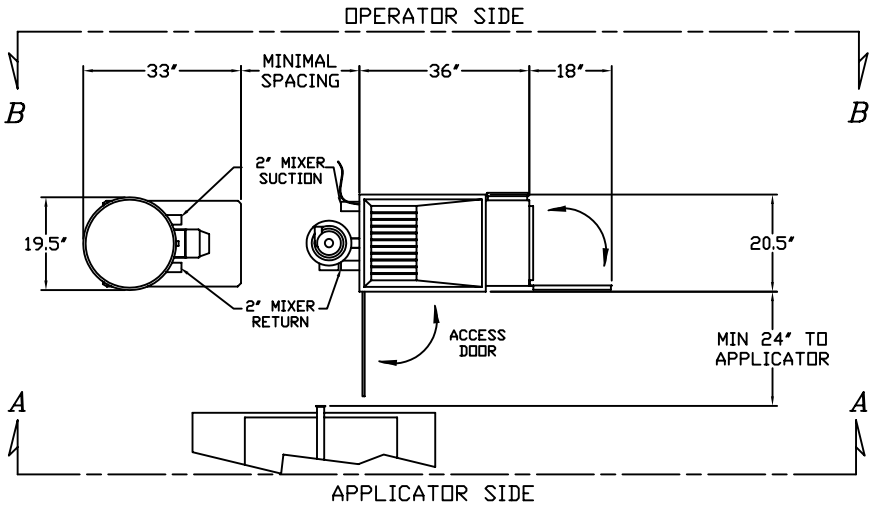

NOTES:

1. SERIES 8 MIXER ELECTRICAL:
   - 2-1/3 HP., 230/460V., 3 PH., 60 Hz.
   - 120 VOLT INPUT FOR OPERATOR CONTROL CIRCUIT.

   MIXER WATER INPUT:
   - 12 GPM. @ 40 PSI. WITH 1/2″ SUPPLY MINIMUM.

2. CRYOLATOR 4.5x6
   - ELECTRICAL = 2 HP., 230/460V., 3 PH., 60Hz.
   - HYDRAULIC = 8 GPM. @ 800 PSI.

3. RESERVE TANK - RT50
   - ELECTRICAL - 230V/460V., 3 PH., 60 Hz.
   - HYDRAULIC - 14 GPM. @ 800 PSI.

4. CONNECTIONS SHOULD NOT INTERFERE WITH EQUIPMENT FUNCTION.

5. FOOD VINYL TUBE (REINFORCED FOR SUCTION) IS USED FOR CONNECTIONS. TUBE BENDS ARE USED AS NEEDED TO PREVENT KINKING.

6. THE MIXING SYSTEM SHOULD NOT BE MORE THAN TWO FEET FROM THE APPLICATOR.

7. MIXER MUST HAVE 24″ CLEARANCE ON BOTH SIDES TO OPEN DOORS.

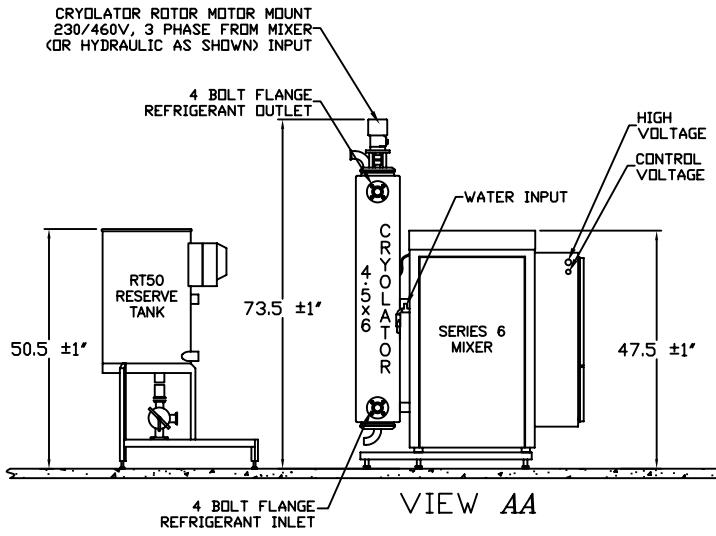

VIEW *AA*

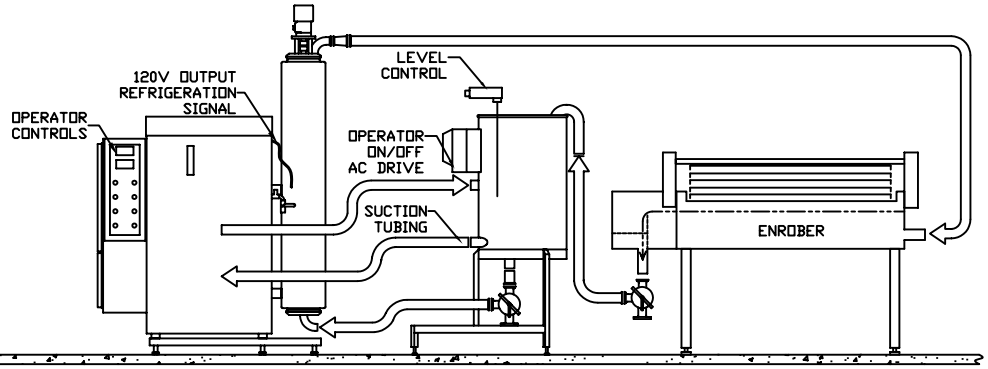

VIEW BB

Wilevco, Inc.
10 Fortune Drive
Billerica, MA 01821-3996
Phone: (978) 667-0400
Fax: (978) 670-9191

THIS DRAWING AND ANY DESIGN HEREON IS COPYRIGHT AND REMAINS THE PROPERTY OF WILEVCO INC. IT MAY NOT BE COPIED, LOANED OR DISCLOSED TO A THIRD PARTY WITHOUT WRITTEN CONSENT. IT IS SUBJECT TO RECALL.

No.	Revision Description	Date	By/App.

INSTALLATION LAYOUT SERIES 6 MIXER, CRYOLATOR RESERVE TANK & ENROBER

Scale	Date	Drawn By
1 = 1	08/11/2007	M R Lohkamp

CAD File Name: SE - 0737